

G-Box Expert GL-4 75W-90

Automotive Gear Oil



Semisynthetic



Mechanical transmissions



EP properties



Oxidation Stability



Low-temperature properties

G-Box Expert GL-4 75W-90 is high quality gear oil for heavy duty manual transmissions and rear axles where operations require gear lubricants with excellent load-carrying capability over wide operating temperatures and where extreme pressures are expected. G-Box Expert GL-4 75W-90 is formulated from a blend of synthetic and highly refined mineral base oils and advanced additive package to provide superior wear protection, excellent low temperature characteristics and high temperature stability when compared to conventional mineral gear oils.

Applications



- Passenger cars, light- and heavy-duty trucks, busses, vans
- Off-highway industries including: construction, quarrying, and agriculture
- Transmissions and axles and other applications where mild extreme pressure gear oil meeting API GL-4 are recommended
- Not suitable for automatic, manual, or semi-automatic transmissions for which engine oil or automatic transmission fluids are recommended
- Not suitable for limited slip applications

Features	Advantages and Potential Benefits
Good extreme pressure properties	Reduced gear wear and extended life in transmissions
Excellent frictional properties	Improved smooth shifting performance
Improved thermal and oxidation stability	Reduced deposits and sludge build-up for long transmission life
Good low temperature performance	Oil flows and circulates more quickly at low temperatures to extend transmission life
Rust and corrosion protection	Protection of copper and its alloys for improved gear performance and long component life
Compatible with all common seal materials	Excellent leakages control

Meets the requirements:

- API GL-4

Approvals:

- AVTOVAZ

Typical Characteristics

Properties	Method	G-Box Expert GL-4 75W-90
SAE Viscosity Grade	SAE J306	75W-90
Kinematic Viscosity @40°C, mm ² /s	ASTM D445	111,9
Kinematic Viscosity @100°C, mm ² /s	ASTM D445	15,8
Viscosity Index	ASTM D2270	150
Flash Point (COC), °C	ASTM D92	221
Pour Point, °C	ASTM D97	-42
Density @15°C, kg/m ³	ASTM D4052	856

G-Box Expert GL-4 75W-90 performance benefits



Prolonged gear life

Good wear protection – damaged area due to scoring 4.7 times lower (FZG pitting test, C/9/90);
 Deposits build-up control – oxidation stability 5.2 times better (CEC-L-48-A-00 Apparatus B)


Leakage control

Effect on seals materials 2.5 times lower (VDA 675 301 (70 ACM 121433))


Excellent synchronesh unit performance

Smooth shifting performance – coefficient of friction after 100k gear changes 10% higher (ZF Synchronesh test);
 Synchronesh unit wear 6.5 lower (ZF Synchronesh test)

Wear protection under high loads*

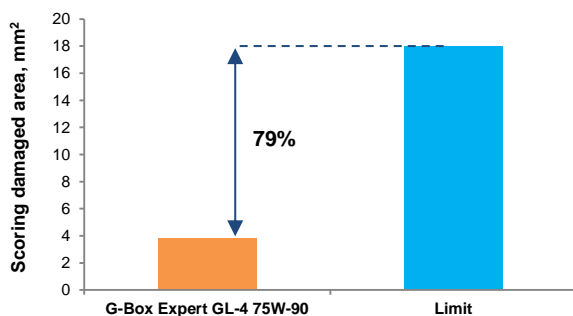

Synchronesh unit prolonged life**

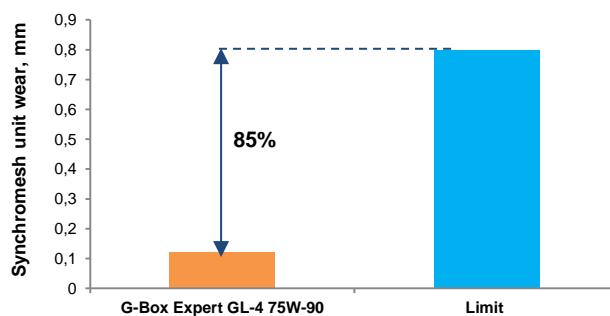

*FZG pitting test, C/9/90; **ZF Synchronesh test

Health, Safety & Environment

Information is provided for products in the relevant Safety Data Sheet (SDS). This provides guidance on potential hazards, precautions and first-aid measures, together with environmental effects and disposal of used products. SDS's are available upon request through your sales contract office. This product should not be used for purposes other than its intended use.

G-Box Expert GL-4 80W-85

Automotive Gear Oil



Mineral



Mechanical transmissions



EP properties



Oxidation Stability



Low-temperature properties

G-Box Expert GL-4 80W-85 is high quality gear oil for heavy duty manual transmissions and rear axles where operations require gear lubricants with excellent load-carrying capability over wide operating temperatures and where extreme pressures are expected. G-Box Expert GL-4 80W-85 is formulated from highly refined mineral base oils and advanced additive package to provide excellent wear protection and high temperature stability.

Applications



- Passenger cars, light- and heavy-duty trucks, busses, vans
- Off-highway industries including: construction, quarrying, and agriculture
- Transmissions and axles and other applications where mild extreme pressure gear oil meeting API GL-4 are recommended
- Not suitable for automatic, manual, or semi-automatic transmissions for which engine oil or automatic transmission fluids are recommended
- Not suitable for limited slip applications

Features	Advantages and Potential Benefits
Good extreme pressure properties	Reduced gear wear and extended life in transmissions
Excellent frictional properties	Improved smooth shifting performance
Improved thermal and oxidation stability	Reduced deposits and sludge build-up for long transmission life
Rust and corrosion protection	Protection of copper and its alloys for improved gear performance and long component life
Compatible with all common seal materials	Excellent leakages control

Meets the requirements:

- API GL-4

Approvals:

- MB 235.1
- ZF TE-ML 17A
- AVTOVAZ

Typical Characteristics

Properties	Method	G-Box Expert GL-4 80W-85
SAE Viscosity Grade	SAE J306	80W-85
Kinematic Viscosity @40°C, mm ² /s	ASTM D445	124,2
Kinematic Viscosity @100°C, mm ² /s	ASTM D445	13,1
Viscosity Index	ASTM D2270	99
Flash Point (COC), °C	ASTM D92	228
Pour Point, °C	ASTM D97	-29
Density @15°C, kg/m ³	ASTM D4052	889

Health, Safety & Environment

Information is provided for products in the relevant Safety Data Sheet (SDS). This provides guidance on potential hazards, precautions and first-aid measures, together with environmental effects and disposal of used products. SDS's are available upon request through your sales contract office. This product should not be used for purposes other than its intended use.

✔ ISO 9001

✔ ISO 14001

✔ ISO/TS 16949

✔ OHSAS 18001

CERTIFIED

GAZPROMNEFT – LUBRICANTS, LTD.
14/3, Krzhyzhanovskogo Street, Moscow, 117218 Russia
Tel: +7 (495) 642-99-69
Fax: +7 (495) 921-48-63
www.gazpromneft-oil.com

While the information and figures given here are typical of current production and conform to specification, minor variations may occur. The information contained is subject to change without notice. Gazpromneft-Lubricants accept no liability for any damage or loss resulting from using the product in purposes other than it intended, from any failure to comply with the recommendations or from hazards inherent in the nature of the material. If you require any further information please consult our technical helpdesk. E-mail: OilSupport@gazprom-neft.ru 05/2018